


## VARIABLE ANGLE LIVE TOOL HOLDER

## **VDI 40 / OKUMA**

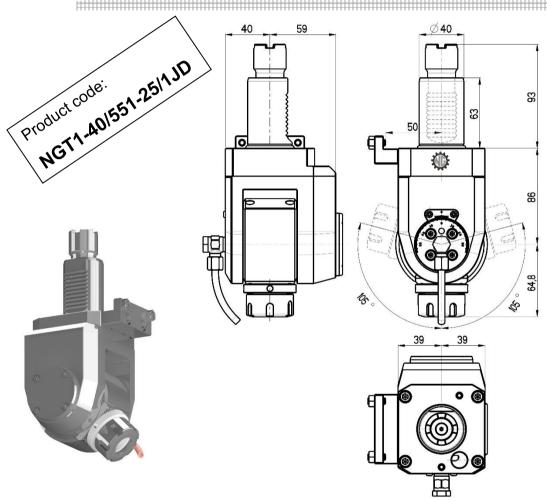

Max. speed: 6000 rpm

Max. torque: 16 Nm

Collet: ER25

Direction of rotation: CO

Ratio: 1:1

Cooling: external (internal cooling available)

## **Accessories**

Nut: Clamping wrench type E 25

Spindle: Hook wrench DIN 1810B 40-42



